

Spitfire Series

Fast Ethernet, 3.3VDC, MIL-DTL-38999, 100Base-TX/FX Media Converter, Multimode, 1310nm

Dual Port, Receptacle

FEATURES

- Compliant with IEEE-802.3:2005 Fast Ethernet 100Base-TX and 100Base-FX
- Optical fiber link distances up to 2.0 Kilometers
- Operating temperature range from -40°C to +85°C
- Shock, vibration and immersion resistant per MIL-STD-810 and MIL-STD-1344
- Aluminum alloy MIL-DTL-38999 housings are strong, durable, corrosion resistant and light weight
- MIL-T-29504 compliant optical fiber connector interface
- MIL-DTL-38999 insert configuration conforms to MIL-STD-1560
- Samtec EQCD Series electrical connector for SMT interface

APPLICATIONS

Spitfire series bulkhead mounted Fast Ethernet media converters enable high speed network communications over long distances in harsh environments.

- Fast Ethernet switches and peripherals
- Telecom and datacom switch / router rack-to-rack links
- Storage or computation clusters

The MIL-DTL-38999, Series III shell provides a sealed external, optical interface that is water-tight to MIL-STD-810 when mated.

The multimode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quad coax copper conductors unacceptable.

US Pat. # 7,093,985



Mil-Dtl-38999 Optical to Samtec SMT Electrical Media Converter

DESCRIPTION

Spitfire series Fast Ethernet media converters consist of optoelectronic transmitter and receiver functions integrated along with the 100Base-TX electrical media to 100Base-FX optical media conversion circuitry into a bulkhead mount MIL-DTL-38999 connector and cable assembly.

The optical transmitters are high performance 1310nm devices. The optical receivers consist of InGaAs PIN and preamplifier assemblies and limiting post-amplifiers.

The electrical interface to the Spitfire series optical media converters is a ribbon coax to Samtec EQCD high density cable assembly enabling SMT interconnection to a customer's backplane, motherboard or daughtercard.

Spitfire series Fast Ethernet media converters are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

- Sealed against liquid and solid contaminants
- Shock and vibration resistant

ORDERING INFORMATION

Application	Product Number
100Base-TX to FX, Flange	*P38F-4L1U-FW-Lxxx
100Base-TX to FX, Jam Nut	*P38J-4L1U-FW-Lxxx

*See Page 6 for standard part number / cable length options

Facilitating Secure Communications in Harsh Environments

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_s	-55		+100	°C
Supply Voltage	V_{cc}	-0.5		+4.5	V
Data Input Voltage	V_i	-0.5		V_{cc}	V

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	T_A	-40		+85	°C
Supply Voltage	V_{cc}	+3.135	3.3	+3.465	V
Power Supply Noise (p-p)	N_p			200	mV

SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883	ESD	Class II	2200V
MIL-STD-810	Vibration	3.8g ² /Hz	43G rms
MIL-STD-810	Shock	40.0g	6-9mS
MIL-STD-810	Immersion	1.0 meter	2 .0Hours
MIL-STD-1344	Flame Resistance	Method 1012	30 Seconds
MIL-STD-1344	Damp Heat	10 Cycles	24 Hours
MIL-STD-38999	Mating Durability	500 Cycles	<0.5dB Change
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

MATERIALS

Item	Detail	Notes
D38999 Cylindrical Shells	Aluminum Alloy	
D38999 Cylindrical Shell Platings	Olive Drab Cadmium, Electroless Nickel or Zinc Nickel	
Inserts	Thermoplastic	
Interfacial Seals	Elastomer	
Alignment Sleeves	Thermoplastic	
Printed Circuits	Polyimide / FR-4	
Backshell	Aluminum Alloy	

Facilitating Secure Communications in Harsh Environments

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to
100Base-FX Media Converter, Multimode, 3.3VDC, 1310nm

TRANSMITTERS T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power	P_o	-19.0		-14.0	dBm
Optical Output Wavelength	λ_{OUT}	1260	1310	1380	nM

RECEIVERS T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity	P_i	-31.5		-12.0	dBm
Optical Wavelength	λ_{IN}	1100		1590	nM

SUPPLY CURRENT T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per Port	I_{CCT}		450	600	mA

OPTICAL FIBER LINK DISTANCES


Application	Fiber Specification	Distance
Fast Ethernet - IEEE 802.3u	62.5/125 μ - 500MHz*Km	2.0Km
FDDI PMD ISO / IEC 9314-3	50/125 μ - 500MHz*Km	2.0Km

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

OUTLINE DRAWING

Flange Mount Option

Dimensions are shown as: inches [mm]

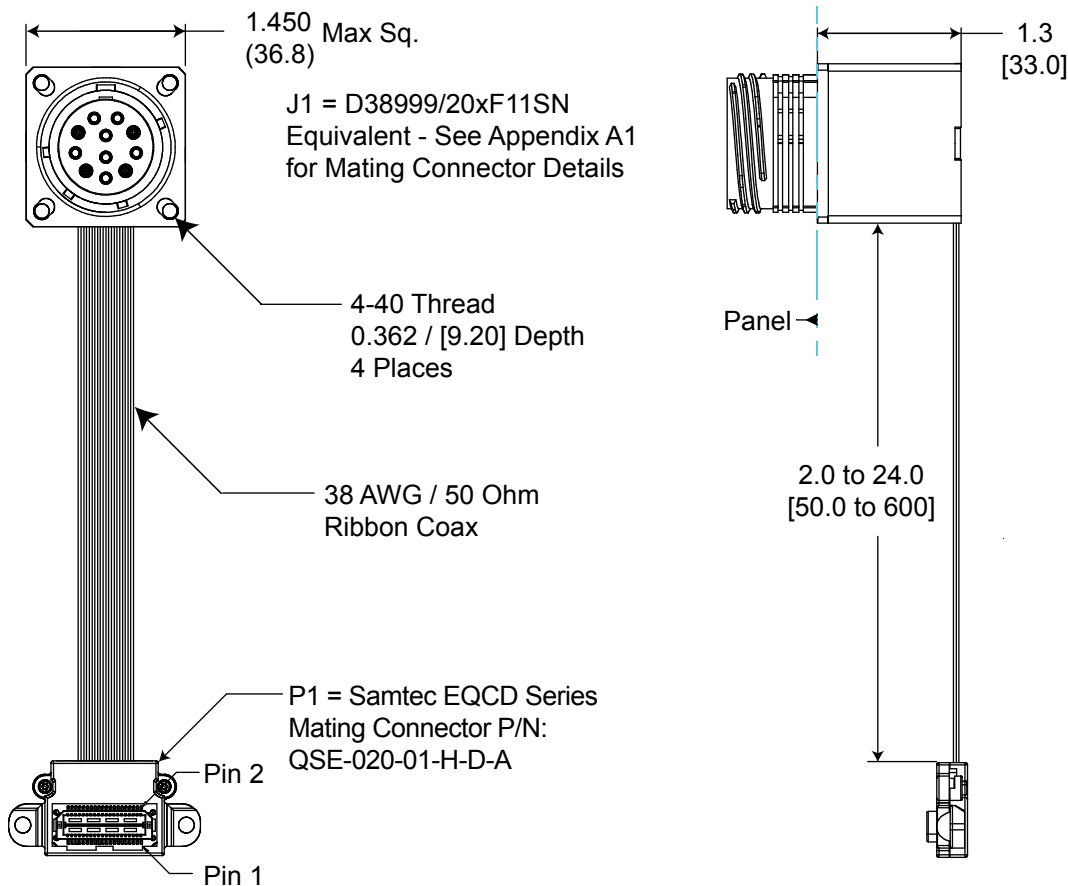


Maximum Weight= 3.8[110] Oz. [Gr.]

Panel Cutout Dimensions

Rear Panel Mounting Only

Shell Size Code	Shell Size	M Min	P Holes	R Bsc
F	19	1.297 [32.94]	0.133 [3.4] / 0.123 [3.1]	1.156 [29.4]

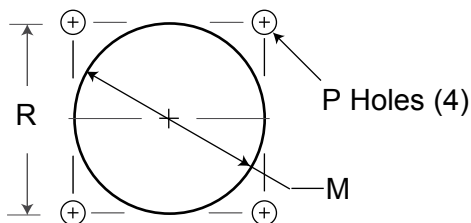

Part Number = *P38F-4xxx-Fx-Lxxx



*see page 6 for part number / cable length options and page 11 for complete ordering option

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

OUTLINE DRAWING

Jam Nut Option


Dimensions are shown as: inches [mm]

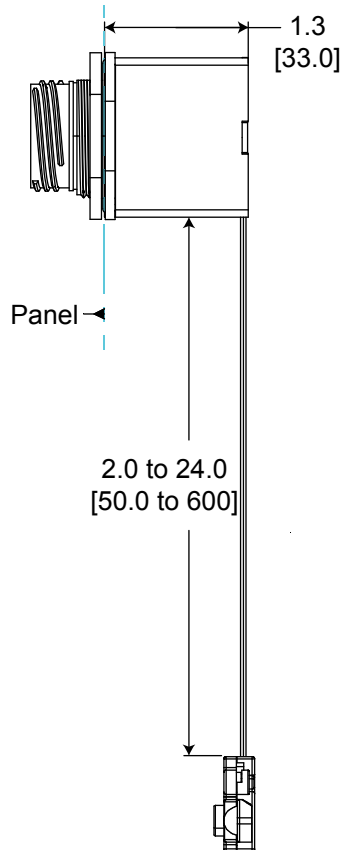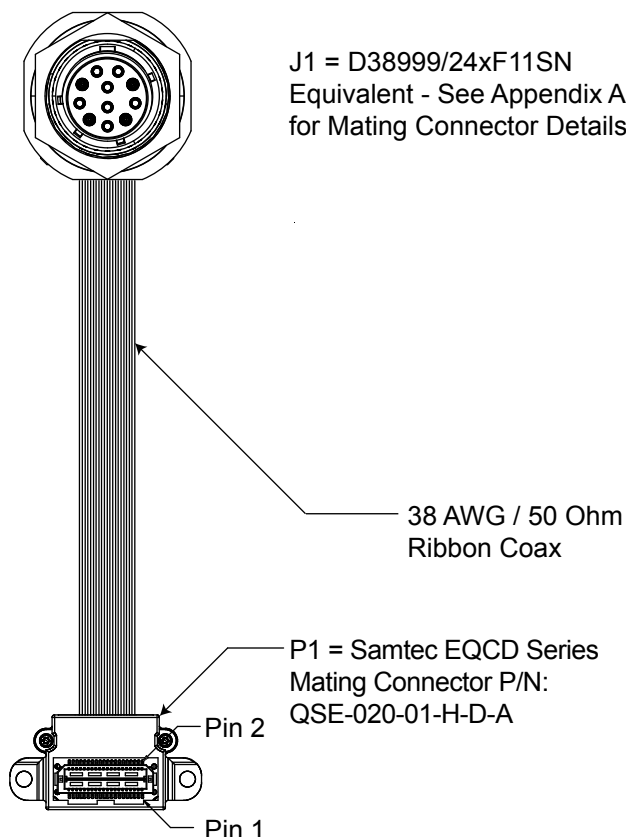

Maximum Weight= 3.8[110] Oz. [Gr.]

Panel Cutout Dimensions

Shell Size Code	Shell Size	D1 Min	D2 Min
F	19	1.385 [35.18]	1.335 [33.91]

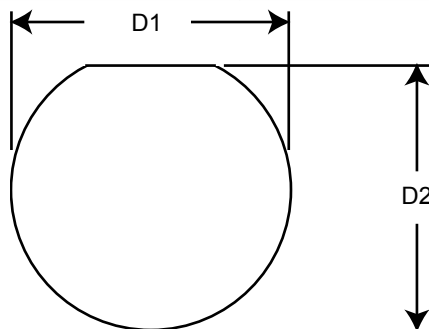


Part Number = *P38J-4xxx-Fx-Lxxx

*see page 6 for part number / cable length options and page 11 for complete ordering options

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

OUTLINE DRAWING Cable Length Options

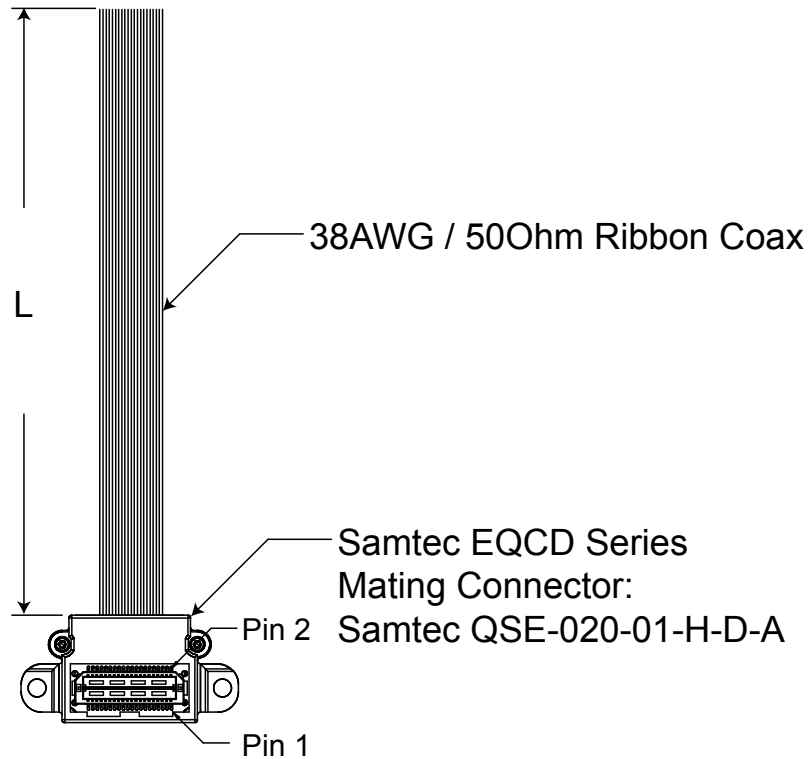


Ribbon Coax Cable Length Options

L (mm) +/- 6.0	ITEM #
50	xxxx-xxxx-xx-L050
100	xxxx-xxxx-xx-L100
150	xxxx-xxxx-xx-L150
200	xxxx-xxxx-xx-L200
250	xxxx-xxxx-xx-L250

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to
100Base-FX Media Converter, Multimode, 3.3VDC, 1310nm

OPTICAL INSERT ARRANGEMENT

TOP



Front view of the D38999 optical
insert shown, fiber optic cable plug
opposite - see Appendix A1 for details


MIL-DTL-38999 OPTICAL INTERFACE

PORT NUMBER	TX	RX
0	H	F
1	B	D

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to
100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

PRINTED CIRCUIT BOARD FOOTPRINT

All dimensions shown are for reference only: inches [mm]

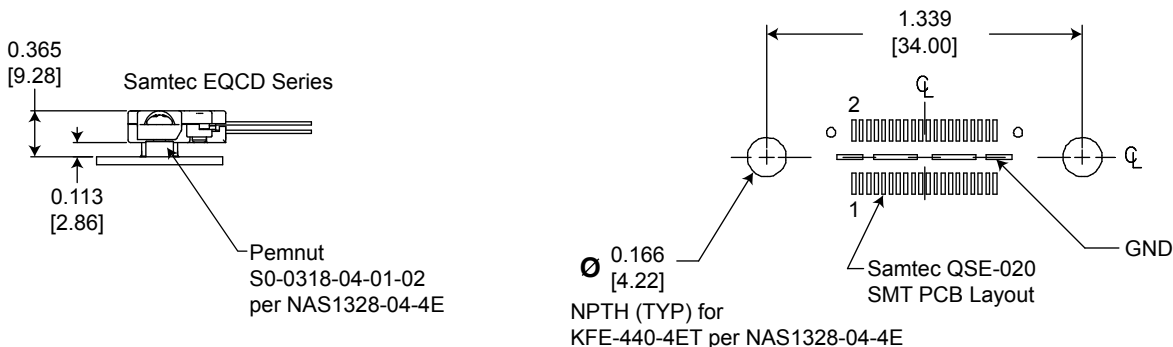

Samtec EQCD PIN ASSIGNMENTS

PIN #	PORT #	FUNCTION	Input / Output	RJ-45 PIN#	Logic Family
1	0	TX_D1+	Output	1	IEEE-802.3:2005 100Base-TX
2	1	TX_D1+	Output	1	IEEE-802.3:2005 100Base-TX
3	0	TX_D1-	Output	2	IEEE-802.3:2005 100Base-TX
4	1	TX_D1-	Output	2	IEEE-802.3:2005 100Base-TX
5	0	RX_D2+	Input	3	IEEE-802.3:2005 100Base-TX
6	1	RX_D2+	Input	3	IEEE-802.3:2005 100Base-TX
7	0	RX_D2-	Input	6	IEEE-802.3:2005 100Base-TX
8	1	RX_D2-	Input	6	IEEE-802.3:2005 100Base-TX
17	0	*Reset_Low	<u>Input</u>	N/A	LVTTL with Internal Pullup
18	1	*Reset_Low	<u>Input</u>	N/A	LVTTL with Internal Pullup
19	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC
20	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC
21	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC
22	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC


*Reset Function: Logic "0" Input = Restart, registers initialized; Logic "1", Open or High Z Input = Normal Operation, center slug is isolated GND, all other pins are N/C

Facilitating Secure Communications in Harsh Environments

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

APPLICATION SCHEMATIC

For Dual Port 100Base-TX to 100Base-FX Media Converter Applications

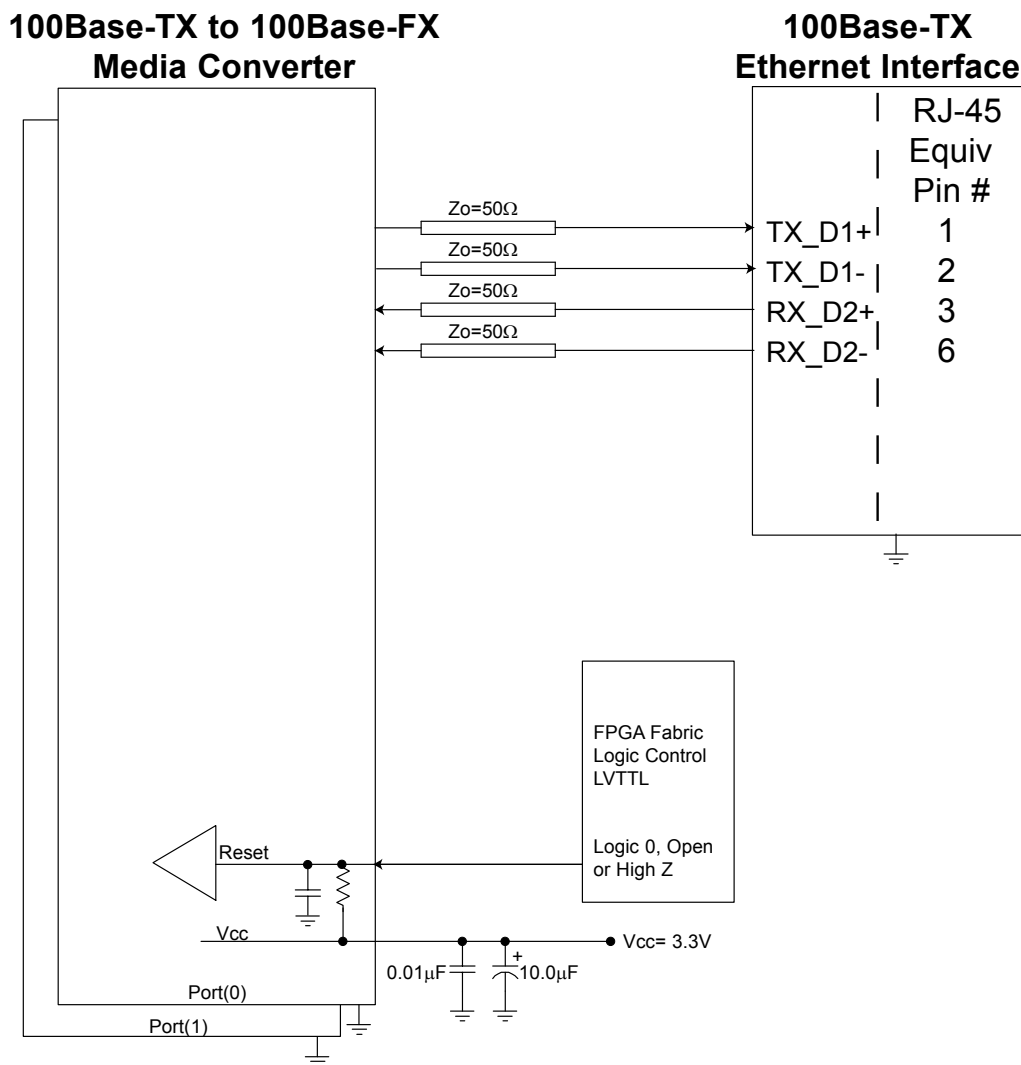

All Protokraft statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and Protokraft assumes no responsibility for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. Protokraft reserves the right to change at any time, without prior or subsequent notice, the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. Protokraft makes no representations that the products herein are free from any intellectual property claims of others. Protokraft and the Protokraft logo are trademarks of Protokraft, LLC. Other trademarks are the property of their respective holders. Contact Protokraft for prices and availability. For the most recent version of this data sheet, please go to the Protokraft website at <http://www.protokraft.com>. In case of discrepancy, the web version takes precedence over any printed literature. ©2004 Protokraft, LLC. All rights reserved.

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nm

APPENDIX A1

MIL-DTL-38999 FIBER OPTIC CABLE PLUG / MIL-T-29504 PIN TERMINI

*See DSCC or SAE QPL for Approved Suppliers


<http://www.dsccl.dla.mil/programs/qmlqpl/QPLdetail.asp?QPL=38999>

*D38999 PLUG - PIN INSERT

MIL-DTL-38999 CABLE PLUG

MS PLUG P/N

*D38999/26WF11PN

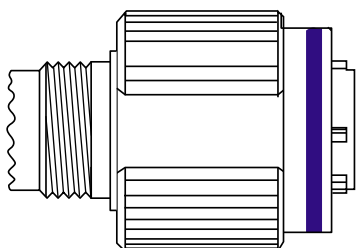


*FIBER OPTIC PIN TERMINUS

MIL-T-29504 PIN TERMINUS

MS PIN TERMINUS P/N

*M29504/04-xxxx**




**defined by fiber optic cable configuration

*CABLE PROTECTION CAP

D38999/32 PLUG PROTECTION CAP

MS PLUG CAP P/N

*D38999/32W19N




*CABLE BACKSHELL

MIL-C-85049 CABLE BACKSHELL

MS BACKSHELL P/N

*MS85049/xxxxxx**

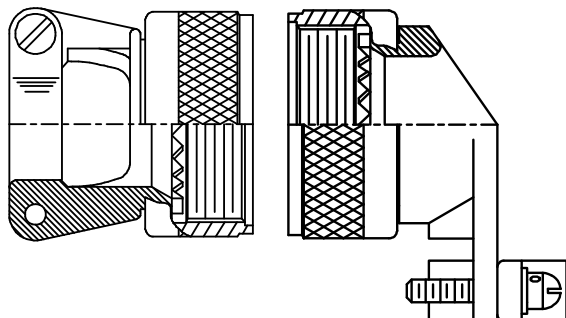


**Straight or angled backshell - defined by application / mounting configuration

D38999 PLUG PORT FUNCTIONS


PORT NUMBER	TX	RX
4	H	F
5	B	D

TOP
Optical Cable Plug Interface

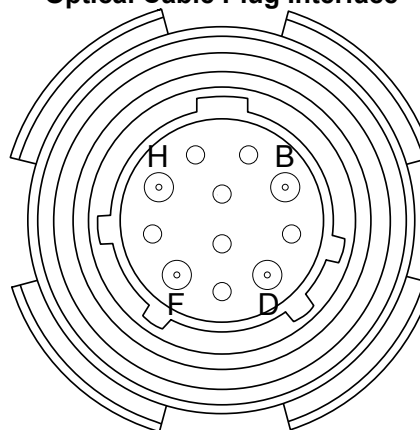

Front face of the optical cable plug pin insert shown. Transceiver insert opposite.

Pin Termini

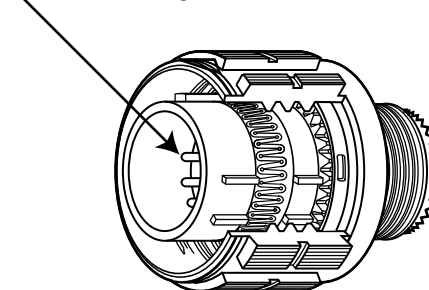

Dual Port Spitfire Series Mil-Dtl-38999, 100Base-TX to 100Base-FX Media Converter, Multimode, 3.3VDC, 1310nM

APPENDIX A2 PART NUMBER OPTIONS

Dual Port, Fast Ethernet

P38 **X** - **4** **L** **1** **U** - **F** **X** **X** - **L**

Shell Configuration
P38= 38999 Receptacle

Shell Configuration
F = Square Flange
J = Jam Nut

Channels (TX+RX)
4= 2TX + 2RX

Wavelength
L= 1310nM

Cable Mode
1= Multimode

Fiber Optic Interface
U = 125 Mbps

Shell Size Code
F = 19 - 11

Shell Plating
F = NI
W = OD CD / NI
Z = ZN / NI

Shell Polarization
(leave blank) _ = N
A = A
B = B
C = C
D = D

Electrical Interface
L = Ribbon Coax to Samtec
EQCD Series - Cable Length
TBD

Other wavelength, mounting and port count options are available. Please consult the Protokraft website for alternate configurations.